



borg &
overström

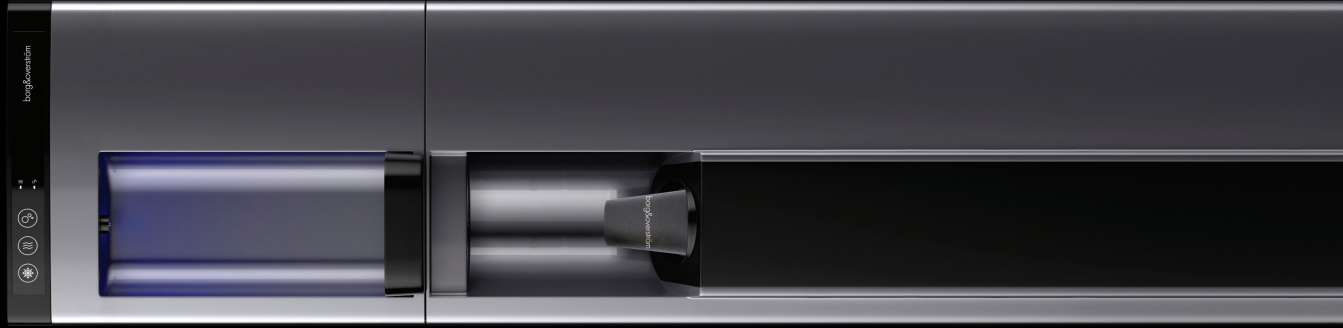

borg & overström



Distinctive
by design.

b04

Compact design for flexibility

Hygienic and ergonomic, B4 flourishes in all environments – from boardroom to sports hall. Its compact size, large dispense area for bottles, multiple water options and flexible configuration make it Borg & Overström's most popular model.

Reasons to choose

- Ultra-hygienic touch-sensitive control panel
- High capacity dispense area for bottles and jugs
- Sealed, hygienic, direct-chill cooling system
- Floorstanding option comes complete with an internal alarmed waste kit
- Unique countertop sparkling model



Distinctive
by design.

Water system



Direct Chill

Configurations



Countertop



Floorstanding

Water options



Chilled



Ambient



Hot



Sparkling


Available colours



Silver



Black



Distinctive
by design.

Borg & Overström Totality®



Driven by a relentless pursuit of excellence, Borg & Overström Totality® is a research and development methodology for the advancement of hygiene, innovation and technology in refreshment systems.



Biofilm, limescale and impact resistant epoxy resin panel finish

Providing an increased level of hygiene and longevity, Fynil® is a scratch and impact resistant epoxy-resin surface finish - effectively resisting biofilm development and limescale cohesion.



World-class filtration

For the ultimate drinking experience, Borg & Overström appliances can be pre-fitted with a 3M filter to reduce sediment, chlorine, odours and scale.

Distinctive
by design.



Laboratory certified 99.999% bacteria-reduced

Every Borg & Overström appliance undergoes an anti-microbial, antipathogen, sanitising procedure. The reassurance of hygienically safe appliances is provided by the unique bacteria-reducing process, Sterizen®.



Ultra-violet sterilising system

For added hygiene confidence, appliances can be fitted with Viovand™ - an ultra-violet sterilisation process that reduces water-borne bacteria.

B4 models	Countertop W320xD470xH415mm	Water system	Dispense height	Max power consumption	Silver	Black
Power requirements Hertz 50/Volts 220-240	Chilled & Ambient	Direct Chill	270mm	100W	103510	103512
Chilled temperature Min 2°C/Max 11°C	Chilled, Hot & Ambient	Direct Chill	270mm	600W	103520	103522
Hot temperature Max 92°C	Chilled, Ambient & Sparkling	Direct Chill	270mm	150W	103530	103532
Throughput litres per hour Chilled & Sparkling 35/Hot 6	Chilled, Hot & Sparkling	Direct Chill	270mm	650W	103540	103542
	Floorstanding W320xD470xH1325mm				Silver	Black
	Internal dimension - W280xD330xH830mm			Base cabinet	103910	103592

